

The MTC HC-300 is a high capacity mobile fuel polishing system designed to efficiently clean and restore fuel to prisitine condition. While connected to a fuel storage tank, the MTC HC-300 act as a dialysis system effectively removing contaminates from such as sludge, particulate, sediment, and water. The system features isolation valves to allow for a multi-phased fuel polishing process and continuous operation during filter changes. The MTC also features a variable frequency drive to control pump motor speeds allowing for a flow rate range of 10 - 300 GPM.



- MTC HC-300 FEATURES:
- Multi-Stage High Capacity Filtration Vessels
- High Flow Rate Vane Pump/Motor Assembly
- Adjustable Flow Rate (VFD Controller)
- 200 Gallon Leak Basin with Drain
- Smart Filtration Controller
- Unique Safety & Alarm Features

## • MTC HC-300 SPECIFICATIONS:

Nominal Flow Rate	10 - 300 GPM (27.9 - 1,135.6 LPM)		
Primary Filter	Four- Bag Filter Vessel, Liner Basket for use with 1-800 $\mu$ Filter Bags		
Secondary Filters	Four- Cartridge Filter Vessel, 2-30µ Particulate, 10-30µ Water Block Filters, or 3-10µ Microglass Filters		
Fuel Conditioner	Inline 3" Magnetic Conditioner		
System Controller	SFC80 Smart Filtration Controller with Safety and Alarm Features		
Pump	15 HP Sliding Vane Pump		
Power	240V/60Hz/3Ph, or 480V/60Hz/3Ph		
Dlumbing	Black Iron		
Plumbing	DIACK ITUIT		
Ports	4" Cam & Groove In 4" Cam & Groove Out		
Ū	4" Cam & Groove In		
Ports	4" Cam & Groove In 4" Cam & Groove Out		
Ports Suction Hose	4" Cam & Groove In 4" Cam & Groove Out 25ft (7.6 m), 4" Diameter		
Ports Suction Hose Discharge Hose	4" Cam & Groove In 4" Cam & Groove Out 25ft (7.6 m), 4" Diameter 25ft (7.6 m), 4" Diameter Powder Coated Carbon Steel, Filter Service		
Ports Suction Hose Discharge Hose Skid	4" Cam & Groove In 4" Cam & Groove Out 25ft (7.6 m), 4" Diameter 25ft (7.6 m), 4" Diameter Powder Coated Carbon Steel, Filter Service Deck, and 200 Gallon Leak Basin with Drain ≈ 96" x 54" x 82" (H x W x D)		

## REPLACEMENT FILTER OPTIONS:

Primary Filter	Part No.	Secondary Filters	Part No.
1 $\mu$ Filter Bag	PFB-150-1	2µ Particulate	618-2-W
5 $\mu$ Filter Bag	PFB-150-5	10µ Particulate	618-10-W
10 $\mu$ Filter Bag	PFB-150-10	10µ Water Block	WA618-10-W
25 $\mu$ Filter Bag	PFB-150-25	30µ Particulate	618-30-W
75 $\mu$ Filter Bag	PFB-150-75	30µ Water Block	WA618-30-W
250 $\mu$ Filter Bag	PFB-150-250	$3\mu$ Micro Glass	G618-3-SR
800µ Filter Bag	PFB-150-800	7µ Micro Glass	G618-7-SR
		10µ Micro Glass	G618-10-SR




1.239.690.9589 1.800.425.4239 Toll Free www.AXI-International.com

f AXI.International

AXInternational 🛗 AXIFuel 8 AXIFuel

REV0203HC30010122



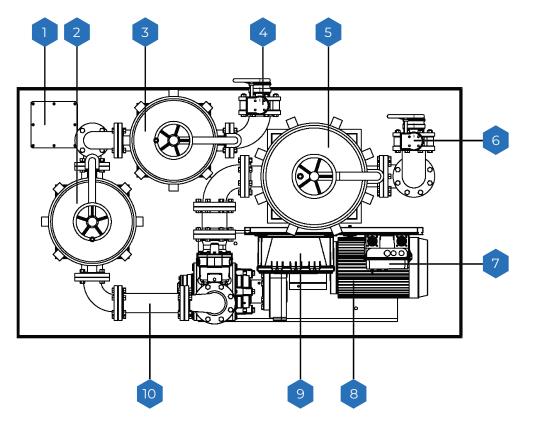

- 1. Leak Basin Access
- 2. Secondary Fine Filter Vessel #1
- 3. Secondary Fine Filter Vessel #2
- 4. Fuel Outlet (To Tank)
- 5. Primary Bag Filter Vessel
- 6. Fuel Inlet (From Tank)
- 7. Variable Frequency Drive (VFD)
- 8. Motor with Coupled Vane Pump
- 9. Smart Filtration Controller
- 10. inline Fuel Conditioner



1.239.690.9589 1.800.425.4239 Toll Free www.AXI-International.com

f AXI.International 🕑 AXInternational 🔠 AXIFuel 😵 AXIFuel REV0203HC30010122