

The MTC HC-50 is a high capacity mobile fuel polishing system designed to efficiently remove water, sludge, and other contaminants from fuel storage tanks. Once on site, the MTC HC-50 can be operated to ensure fuel reliability through routine servicing of the fuel tank(s). The system's fuel polishing process stabilizes diesel and bio-fuels by eliminating various contaminates, ensuring the fuel remains clean. These mobile systems feature a skid-based designed that allows for maximum portability and ease of transportation between the various fuel tanks that require routine servicing.



MTC HC-50 SYSTEM FEATURES:

- Multi-Stage Fuel Filtration
- Portable System Design
- Locking Cam and Groove Connections
- Fine Filter Bypass Capability
- Smart Filtration Controller (Optional)
- Unique Safety & Alarm Features (Optional)
- Remote Pendant Operation (Optional)

MTC HC-50 SPECIFICATIONS:


| Nominal Flow Rate | 25 - 75 GPM (94.6 - 283.9 LPM) | | |
|---|--|--|--|
| Primary Filter | Bag Filter Vessel, Liner Basket for use with 1-800µ Filter Bags | | |
| Water Separator | FP-90 Mechanical Water Separator | | |
| Secondary Filter | Cartridge Filter Vessel, 2-30μ Particulate, 10-30μ Water Block Filters, or 3-10μ Micro-glass Filters | | |
| Fuel Conditioner | LG-X 4000 Inline Magnetic Conditioner | | |
| System Controller | SFC50 Smart Filtration Controller with Safety and Alarm Features | | |
| Pump | Air-Drive Double Diaphragm Pump | | |
| Power | Air Powered (25-50 SCFM @ 90psi) | | |
| Plumbing | Black Iron | | |
| Ports | 2" Cam & Groove In 2" Cam & Groove Out | | |
| Suction Hose | Clear, 25ft (7.6 m), 2" Diameter | | |
| Discharge Hose | 25ft (7.6 m), 2" Diameter | | |
| Dimensions | ≈ 59" x 36" x 45" (H x W x D) (150 x 91 x 114 cm) | | |
| Weight | ≈ 630 lbs (286 kg) | | |
| Not for use with fluids that have a flash point below 100°F (37.8°C). | | | |

REPLACEMENT FILTER OPTIONS:

| Primary Filter | Part No. | Secondary Filter | Part No. |
|---------------------|------------|--------------------|------------|
| 1 μ Filter Bag | PFB-30-1 | 2μ Particulate | 618-2-W |
| 5μ Filter Bag | PFB-30-5 | 10μ Particulate | 618-10-W |
| 10 μ Filter Bag | PFB-30-10 | 10μ Water Block | WA618-10-W |
| 25μ Filter Bag | PFB-30-25 | 30μ Particulate | 618-30-W |
| 75µ Filter Bag | PFB-30-75 | 30μ Water Block | WA618-30-W |
| 250μ Filter Bag | PFB-30-250 | 3μ Micro Glass | G618-3-SR |
| 800μ Filter Bag | PFB-30-800 | 7μ Micro Glass | G618-7-SR |
| | | 10μ Micro Glass | G618-10-SR |
| | | | |

^{*}Standard-issue filter element unless requested otherwise



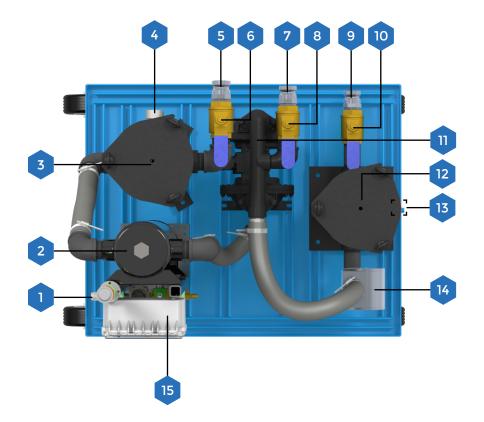

- 1. Air Hose Connection
- 2. Mechanical Water Separator
- 3. Primary Filter Vessel
- 4. Vacuum Gauges
- 5. Fuel Inlet (From Tank)
- 6. Inlet Ball Valve
- 7. Fuel Discharge Port 1
- 8. Outlet Ball Valve (Discharge Port 1)
- 9. Fuel Discharge Port 2
- 10. Outlet Ball Valve (Discharge Port 2)
- 11. Air-Driven Pump
- 12. Secondary Fine Filter Vessel
- 13. Pressure Gauges
- 14. Fuel Conditioner
- 15. Smart Filtration Controller

MTC HC SYSTEM INTEGRATION

